



# HEAVY DUTY REAR LOADER



**Built for reliability like our Standard model, but with more compaction to get the heavy jobs done.**

- Increased compaction force that can handle up to 1,000 pounds of refuse per cubic yard.
- Fast pack cycle time and pack-on-the-go hydraulics keep the hopper clear and help save time, especially on routes crowded with stops.
- Tough abrasion-resistant steel used in the rear loader's highest wear areas, featuring 1/4" AR200 on the hopper floor and AR450 on the sidewalls.
- Most requested, productive and reliable rear loader in the industry for residential and commercial routes.
- Like all McNeilus rear loaders, the Heavy Duty draws a top resale value of any similar refuse truck.
- Optional McNeilus® Excalibre™ packing cylinders feature a hardened nitrided rods and a patented tool steel shaver that keep refuse debris out, reducing hydraulic contamination.

## PERFORMANCE SPECIFICATIONS (in seconds)\*

### WORKING RPM @ IDLE

Dump Cycle	16
Sweep Extend	4
Sweep Retract	2
Slide Extend	3
Slide Retract	7
Tailgate Open	30
Tailgate Closed	18
Compaction = 1,000 lb/yd <sup>3</sup>	
Quick Change UHMW Polyethylene Slide Shoes	
	20 YD <sup>3</sup> 25 YD <sup>3</sup> 28 YD <sup>3</sup> 32 YD <sup>3</sup>
Ejector Extend	12    20    27    33
Ejector Retract	13    28    30    40

\*Cycle times may vary slightly

## STANDARD BODY SPECIFICATIONS

Body Floor	3/16 in. AR200
Side Walls, Front Section	10-gauge AR200
Side Walls, Rear Section	1/8 in. AR450
Roof	10-gauge AR200

## HOPPER SPECIFICATIONS

Hopper Capacity	3 cu yd
Hopper Floor	1/4 in. AR200

## PACKER/EJECTOR SPECIFICATIONS

Slide Face Plate	3/16 in. grade 50 high-strength steel
Sweep Face Plate	1/4 in. AR200
Packer Edge Strip	1/4 in. grade 50 high-strength steel

## TAILGATE SPECIFICATIONS

Tailgate Walls	3/16 in. AR200
Wear Strips	1/2 in. x 3 in. 1044 steel
Tailgate Seal Height	50 in

## OPERATIONS

Mechanical controls with integrated control panel

## HYDRAULICS

Pump	Single gear or vane with pack-on-the-go flow control system
Control Valves	Primary; Parker VA35 with Smart-Pak®
Oil Reservoir	20 yd <sup>3</sup> : 40 gallon 25-32 yd <sup>3</sup> : 50 gallon
Filter	Parker 40 CN, 100 mesh suction strainer

## CYLINDERS

Ejector Cylinder	20 YD <sup>3</sup> : 7-1/4 in. bore x 5-3/4 in. rod x 88-3/4 in. stroke (3-stage) 25 YD <sup>3</sup> : 7-1/2 in. bore x 7 in. rod x 119-1/2 in. stroke (4-stage) 28 YD <sup>3</sup> : 7-1/2 in. bore x 7 in. rod x 138 in. stroke (4-stage) 32 YD <sup>3</sup> : 8-3/4 in. bore x 8-1/4 in. rod x 163 in. stroke (5-stage)
Slide Cylinders	5 in. bore x 4 in. rod x 32-1/2 in. stroke
Sweep Cylinders	4-1/2 in. bore x 3-1/2 in. rod x 23 in. stroke
Tailgate Cylinders	2-7/8 in. bore x 2-1/2 in. rod x 38 in. stroke

## PAINTING

Packer and components steel shot blasted prior to priming with high solids epoxy primer  
Finish: PPG high-performance, high solids acrylic urethane topcoat


## POPULAR OPTIONS

- Spool Winch or Reeving Cylinder
- Guides and Latches
- Container Lift Bar


## McNEILUS WARRANTIES

Contact your McNeilus representative on warranty details.  
For more information, go to [www.McNeilusGarbageTrucks.com](http://www.McNeilusGarbageTrucks.com)

# HEAVY DUTY REAR LOADER

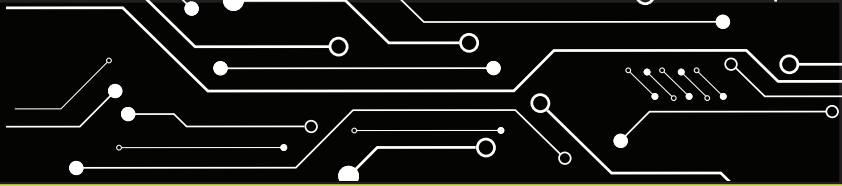

- Industry's best factory-direct service and support network, with mobile service trucks ready to answer your call.
- Proudly made in the USA.
- McNeilus CNG Systems and Service offers compressed natural gas systems in a variety of configurations and capacities for the Heavy Duty Rear Loader.

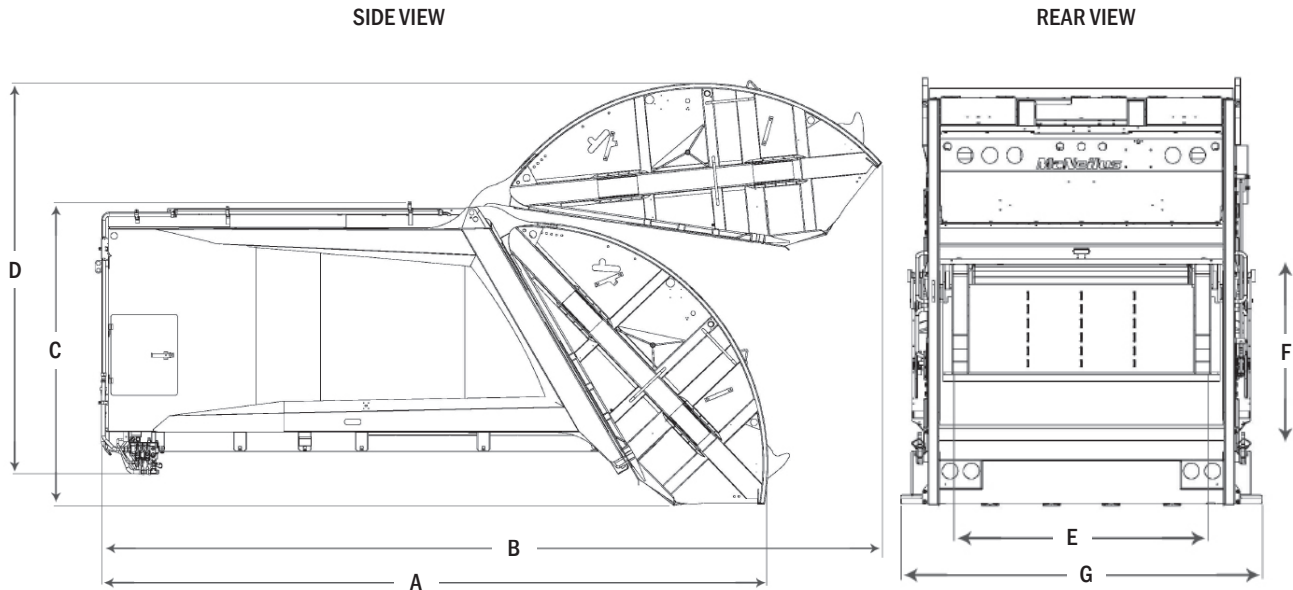

DIMENSIONS								
DESCRIPTION	20 YD <sup>3</sup> (15.3 M <sup>3</sup> )		25 YD <sup>3</sup> (19.1 M <sup>3</sup> )		28 YD <sup>3</sup> (21.4 M <sup>3</sup> )		32 YD <sup>3</sup> (24.5 M <sup>3</sup> )	
(A) Overall Length, Tailgate Closed	246 in.	6248 mm	278 in.	7061 mm	297 in.	7544 mm	322 in.	8179 mm
(B) Overall Length, Tailgate Raised	262 in.	6655 mm	294 in.	7468 mm	313 in.	7950 mm	338 in.	8585 mm
(C) Overall Height, Tailgate Closed**	99 in.	2515 mm	99 in.	2515 mm	99 in.	2515 mm	99 in.	2515 mm
(D) Overall Height, Tailgate Raised**	150 in.	3810 mm	150 in.	3810 mm	150 in.	3810 mm	150 in.	3810 mm
(E) Inside Hopper Width	80 in.	2032 mm	80 in.	2032 mm	80 in.	2032 mm	80 in.	2032 mm
(F) Hopper Opening Height	57 in.	1448 mm	57 in.	1448 mm	57 in.	1448 mm	57 in.	1448 mm
(G) Overall Width w/Steps	102 in.	2591 mm	102 in.	2591 mm	102 in.	2591 mm	102 in.	2591 mm
Overall Width w/o Steps	96 in.	2438 mm	96 in.	2438 mm	96 in.	2438 mm	96 in.	2438 mm

Note: Dimensions will change with roof/tailgate-mounted CNG options.

\*\*Dimension with no winch. Adding a spool winch or reeving cylinder winch will increase height dimension to between 100-108 inches depending on the option chosen.



**STREET  
SMART  
PARTS**

We offer a complete line of aftermarket parts and services to fit all makes and models. View and purchase at [www.StreetSmartParts.com](http://www.StreetSmartParts.com) or call 888.686.7278.

**McNeilus**

Learn more at [www.McNeilusGarbageTrucks.com](http://www.McNeilusGarbageTrucks.com) | [StreetSmartParts.com](http://StreetSmartParts.com)

© 2024 McNeilus Truck and Manufacturing. McNeilus and the McNeilus logo, Street Smart Parts and the Street Smart Parts logo are trademarks of McNeilus Truck and Manufacturing, Dodge Center, MN, USA. All other designated trademarks are the property of their respective owners. Specifications, descriptions and illustrations in this brochure are accurate as shown at the time of publication, but are subject to change without notice. Illustrations may include optional equipment and accessories and may not include all standard equipment.